


STANDARD FC-1 FRAMES AND COVERS. USE PRECAST RISER RINGS TO ADJUST TO GRADE. SEAL CASTING & RISERS TO TANK WITH BUTYL RUBBER.



- NOTES:**
1. ALL PIPE SIZES SHALL MATCH INLET/OUTLET NOMINAL PIPE SIZES.
 2. SET INLET INVERT 3" ± 0.5" ABOVE OUTLET INVERT.
 3. PIPE & FITTINGS SHALL BE SOLVENT WELD SCHD.40 PVC UNLESS SHOWN OTHERWISE ON PLANS.
 4. GREASE TRAPS LOCATED WITHIN PARKING OR DRIVE AREAS SHALL BE DESIGNED AND CONSTRUCTED FOR H-20 LOAD RATING.

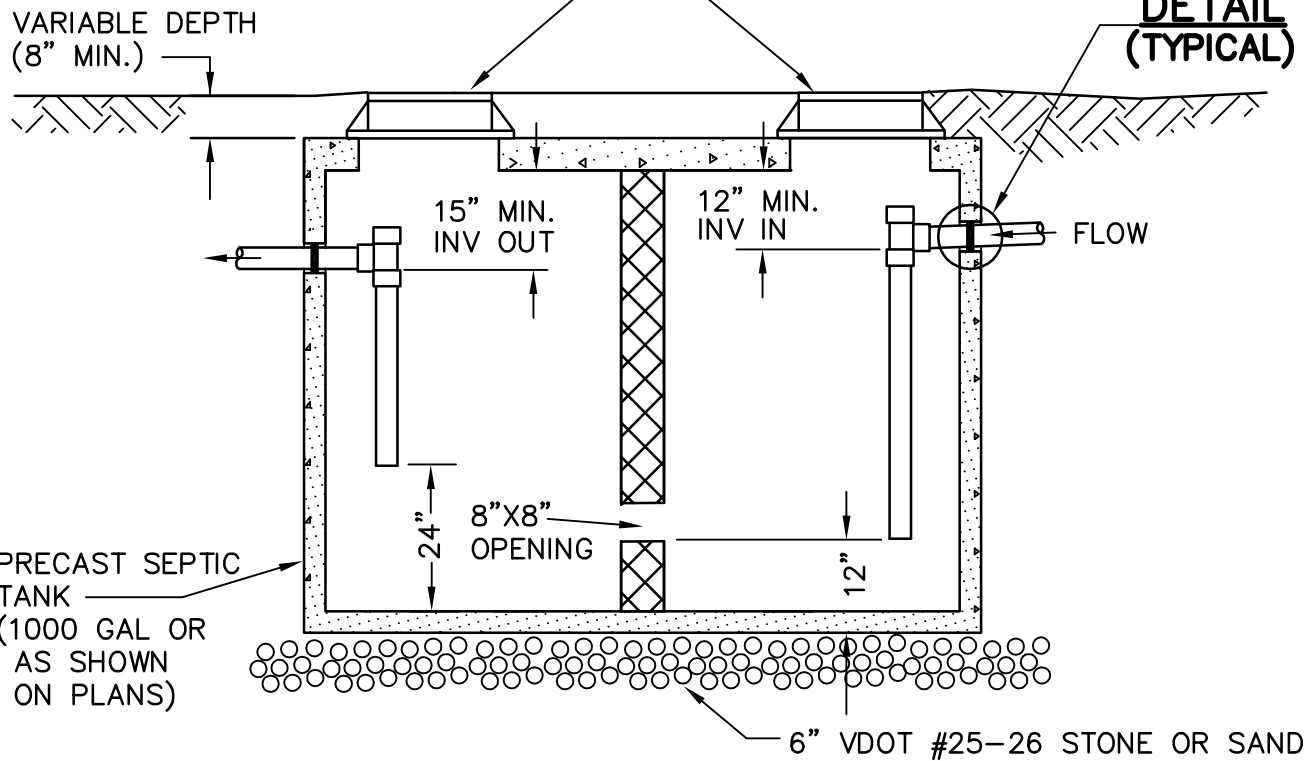

ENGINEERING DEPARTMENT
 100 EAST MAIN STREET
 CHRISTIANSBURG, VA 24073
 (540) 382-6120 PHONE
 (540) 381-7238 FAX
 engineering@christiansburg.org

GREASE TRAP WITH MANHOLE LIDS

DATE: 01 NOV 2004
 SCALE: N.T.S.
 DETAIL NO. GT-I